


# Specifications: Model 303(7) NPT Valve

## Horizontal Flow

Distributed By  
  
**Meter, Valve & Control**  
**877-566-3837**

Flow Direction  
Arrow


Visual  
Status  
Window

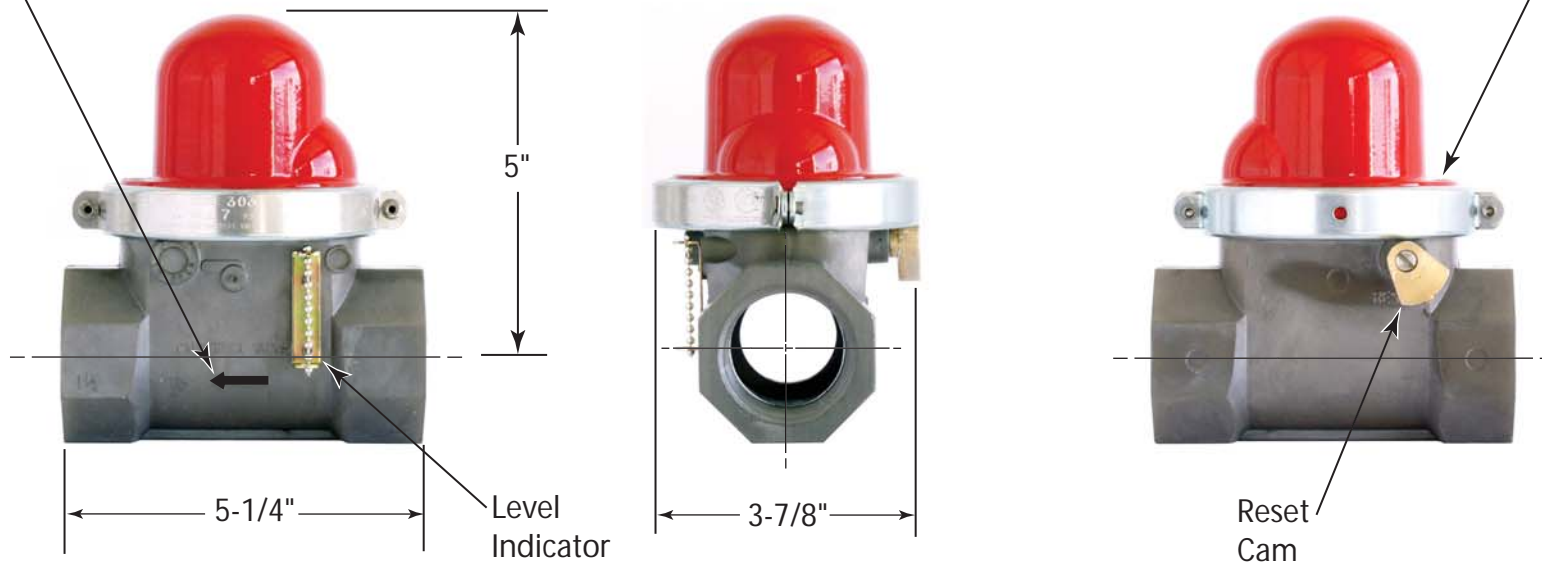

Valve Model#	CA-DSA No.	Length	Height	Width	Nominal Pipe Size	Threads Per Inch	APPLICATION	DATA
							Max. Pressure	Fuel
303(7)	45R-113R	5-1/4"	5"	3-7/8"	1-1/2"	11-1/2	7.0 psi	Dry Fuel Gas

| [sales@mvandc.com](mailto:sales@mvandc.com) | Phone: 877.566.3837 | Fax: 925.407.2903

California Seismic Valves are UL listed in the USA and Canada, Certified by the California State Architect's Office, Approved by the City of Los Angeles, and are warranted free of manufacturer's defects for 30 years. All valves meet California Standards for Earthquake Actuated Automatic Gas Shut off Systems, Standard No. 12-23-1, ANSI Z21.70, 1981 and ASCE 25-97 Standards.

  
 233 East Avenue H-8 • Lancaster, CA 93535 • USA

Tel (661) 942-4499  
 Fax (661) 942-0999  
 TF (800) 4-GAS-OFF  
[www.4GasOff.net](http://www.4GasOff.net)

# 1-1/2" Model 303 California Seismic Valve Threaded Horizontal

## FLOW CAPACITY TABLE IWC/PSIG - Capacity S.C.F.H.

Merit Rating: Cv 101 (Equivalent Length of Pipe is 5 Feet)

For determining approximate values at selected natural gas pressures to 60 PSIG

Pressure Drop		8" iwc Inlet	14" iwc Inlet	3 psi Inlet	5 psi Inlet	7 psi Inlet	10 psi Inlet	20 psi Inlet	60 psi Inlet
PSI	IWC								
.0036	0.1	1,741	1,754	1,891	1,995	2,094	2,234	2,648	3,886
.0072	0.2	2,462	2,480	2,674	2,821	2,961	3,159	3,745	5,495
.0108	0.3	3,015	3,037	3,275	3,455	3,627	3,869	4,586	6,730
.0144	0.4	3,454	3,478	3,781	3,989	4,187	4,468	5,296	7,771
.0180	0.5	3,892	3,920	4,227	4,460	4,681	4,994	5,921	8,688
.0216	0.6	4,263	4,293	4,630	4,885	5,127	5,471	6,485	9,517
.0252	0.7	4,604	4,637	5,001	5,276	5,538	5,909	7,005	10,280
.0288	0.8	4,921	4,956	5,345	5,640	5,920	6,316	7,488	10,989
.0324	0.9	5,219	5,256	5,669	5,981	6,278	6,699	7,942	11,655
.0360	1.0	5,501	5,540	5,975	6,304	6,617	7,061	8,371	12,285
.0720	2.0	7,770	7,826	8,441	8,908	9,350	9,978	11,832	17,370
.1080	3.0	9,505	9,573	10,328	10,899	11,442	12,212	14,483	21,269
.1440	4.0	10,962	11,041	11,914	12,574	13,201	14,090	16,715	24,553
.1800	5.0	12,241	12,330	13,306	14,045	14,747	15,742	18,679	27,445

## Horizontal Valves



Maximum Pressures of Available Sizes	7 psi 60 psi	Sizes Available														Ambient Temperature UL -40° to 150° F CA DSA: -10° to 150°F Fluid Natural gas LP gas
		NPT								Flanged						
		3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"	2"	2 1/2"	3"	4"	6"	8"	
		✓	✓	✓	✓											
		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	