




ROMET

Distributed By
MVC
 Meter, Valve & Control
 877-566-3837

Rotary Gas Meters

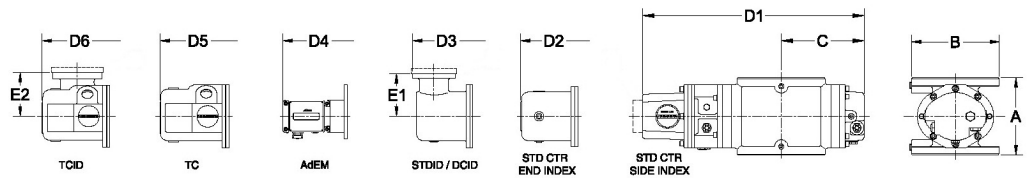

METER SIZE	ANSI 125 FF FLANGE	A	B	C	D1	D2	D3	D4	D5	D6	E1	E2	WEIGHT (lbs)
RM2000	2"	6.75"	Ø 6.0"	4.75"	13.28"	14.70"	15.54"	16.48"	15.82"	15.88"	4.00"	4.00"	26-33

RM2000 - IMPERIAL


IMPERIAL RM2000 2" FLANGE CONNECTION

TECHNICAL SPECIFICATION

Connection (Flanged)	ANSI 125 FF	2"
MAOP	(psig)	175
Flow Capacity	(cfh)	2000
Rangeability @ ± 1% Error		40:1
Rangeability @ ± 2% Error		70:1
Start Rate	(cfh)	2.5
Stop Rate	(cfh)	2.0
Differential @ 100% Flow	(I.W.C.)	0.76
Instrument Drive Rate	(cf/rev)	10/100
LF Pulsar (Optional on Std Ctr)	(cf/pulse)	10/100

CORRECTED FLOW CAPACITY AND TYPICAL ACCURACY GUIDE

RM2000 METER (SCFH)	
Gauge Pressure P.S.I.G. 0.25	RM2000 Qmax = 2000ft ³ /hr
2	2091
5	2634
10	3313
15	3992
20	4671
25	5350
50	8744
75	12138
100	15533
125	18927
150	22322
175	25716

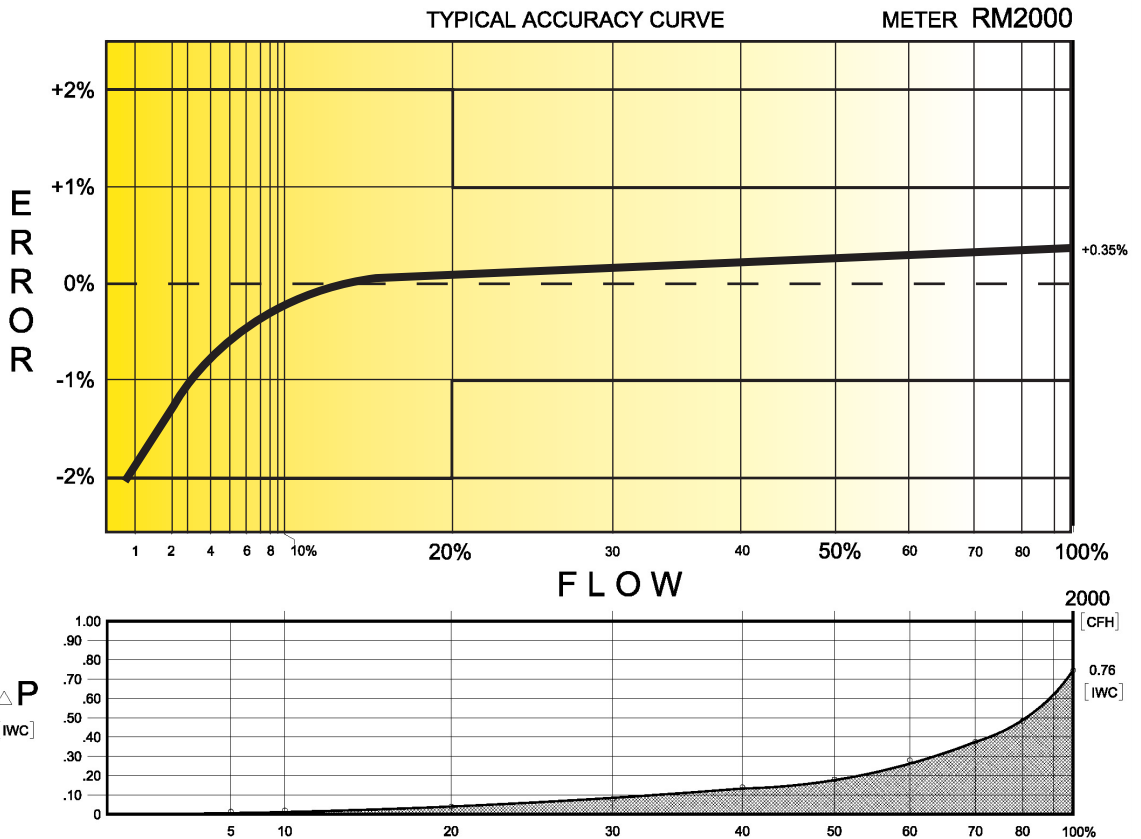

ROMET

The values quoted are typical of normal production. They do not constitute a specification. Romet Limited reserves the right to change any information in this literature without notice. All of the information and data in this literature has been carefully compiled and thoroughly checked.