

ROMET



Rotary Gas Meters




IMPERIAL RM600 2" FLANGE CONNECTION

TECHNICAL SPECIFICATION

Connection (Flanged)	ANSI 125 FF	2"
MAOP	(psig)	175
Flow Capacity	(cfh)	600
Rangeability @ ± 1% Error		25:1
Rangeability @ ± 2% Error		50:1
Start Rate	(cfh)	1.8
Stop Rate	(cfh)	1.5
Differential @ 100% Flow	(I.W.C.)	0.25
Instrument Drive Rate	(cf/rev)	10
LF Pulser (Optional on Std Ctr)	(cf/pulse)	10

CORRECTED FLOW CAPACITY AND TYPICAL ACCURACY GUIDE

RM600 METER (SCFH)		
Gauge Pressure P.S.I.G. 0.25	RM600 Qmax = 600ft ³ /hr	
2	627	
5	790	
10	994	
15	1197	
20	1401	
25	1605	
50	2623	
75	3641	
100	4660	
125	5678	
150	6697	
175	7715	

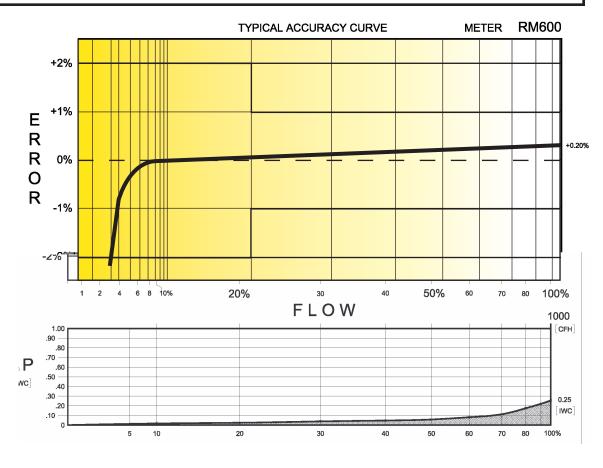



ROMET

The values quoted are typical of normal production. They do not constitute a specification. Romet Limited reserves the right to change any information in this literature without notice. All of the information and data in this literature has been carefully compiled and thoroughly checked.