

# SUBMITTAL

**Manufacturer:** Itron  
(formerly Actaris / Schlumberger)  
**Model:** B58

As Specified	
Capacity Required	
Inlet /Outlet Pres.	
Overpres. Limits	

As Submitted	
Capacity	
Droop	
Build-up	

**Options Designations:**

**N:** denotes No Internal Relief

**S** **R:** denotes Internal Relief valve for over-pressure protection

**HP:** denotes High Pressure Construction

**Specifications:**

	Spring Color	Adj. Range
	Brown	4.5 – 5.5" w.c.
	Dk Green	5 – 6.5" w.c.
<b>S</b>	Gray	4 - 9" w.c.
	Light Green	5.5 - 8" w.c.
	Black	7.3 – 11" w.c.
	Blue	8 - 12" w.c.
	Silver	11 - 16" w.c.
	Red/Gray (HP)	0.75 – 1.1 PSIG
	Yellow (HP)	0.9 – 1.4 PSIG
	Red (HP)	1.3 – 2.0 PSIG
	White (HP)	1.75 – 2.5 PSIG


	Orifice	MAOP "w.c. delivery	MAOP PSIG delivery
	1/8"	125	175
	3/16"	125	175
	1/4"	125	125
	5/16"	100	100
	3/8"	65	60
<b>S</b>	1/2X9/16	40	40

	Connections (NPT)	
	Inlet	Outlet
<b>S</b>	3/4"	3/4"
	3/4"	1"
	3/4"	1 1/4"
<b>S</b>	1"	1"
	1"	1 1/4"
<b>S</b>	1 1/4"	1 1/4"

**Assembly:**

Valve Body	High Tensile Strength Cast Iron
Orifice:	Aluminum
Valve Seat:	Buna-N
Valve Stem:	Nylon
Lever:	Zinc & dichromate plated steel
Upper Diaphr Plate	Zinc & dichromate plated steel
Lower Diaph. Plate	Die cast aluminum
Diaphragm	Buna N & nylon reinforcing mtl.
Diaphragm case	Die cast aluminum
Vent Screen	Stainless Steel

**Dimensions:**

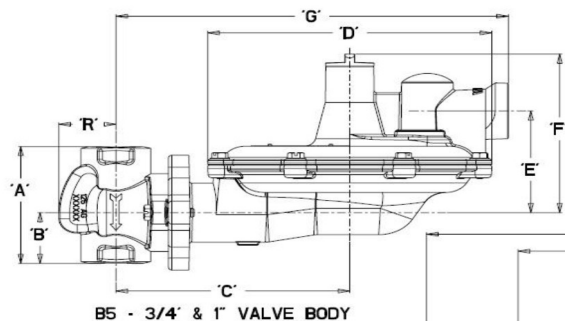

	A	B	C	D	E	F	G	R
3/4" & 1"	3-13/16"	1-21/32"	6	7-5/16"	3-5/16"	5-3/16"	10-5/32"	1-1/2"
1 1/4"	4"	1-7/8"	6	7-5/16"	3-5/16"	5-3/16"	10-5/32"	1-1/2"

Weight: 6.5 Lbs.

**General Note on installation:** The regulator comes with 3/4" or 1" vent with a stainless steel vent screen. On outside installations, the regulator should be oriented with the vent pointing down to keep water or ice from entering the vent. If the regulator is installed with the vent pointing up or to the side, the vent screen should be removed and an 3/4" x 1" elbow (or elbows) should be installed to position the vent correctly. If installed inside, the vent must be piped to a safe outside location in accordance with NFPA 54 recommendations and/or local codes.

**Typical Capacity.**

Note: Capacity will change as a function of the orifice size, inlet pressure & outlet pressure setting. The capacity tables below are for a typical configuration: a 3/4" Regulator, with 1/2x9/16" orifice. Smaller orifices may have less capacity, but will handle higher inlet pressures (see MAOP above). Outlet pipe size and length may also reduce flow. Consult complete brochure for capacities and relief curves of other configurations.

Set Point	Capacity as a Function of Inlet Pressure & Set Point in SCFH				
	14" w.c.	1 PSIG	2 PSIG	3 PSIG	5 PSIG
7" w.c.	310	440	535	580	645
14" w.c.		485	545	635	875
1 PSIG			460	640	800

Capacities expressed for 0.6 s.g. nat. gas  
S-Denotes standard stock configuration

