

Pilot operating pressure regulator

Aperflux 851



Aperflux 851 is pilot-controlled pressure regulator for medium and high pressure applications.

This regulator is suitable for use with previously filtered, non-corrosive gases.

Scan this QR code with your mobile to get more info!



MAIN FEATURES:

- **Pilot Operated – Medium to High Pressure Outlet**
- **“Fail open” type**
- Sizes: **1”, 2”, 3”, 4”, 6”, 8”, 10”**
- Body Materials: **Cast Steel**
- Ratings: **ANSI 300 and 600**
- Connections: **RF**
- Maximum Inlet Pressure: **1,232psig**
- Outlet Pressure: **12 to 942 psig**
- Flow Coefficient (Nat. Gas): **Cg Range 480 to 24,548**
- Minimum operating differential **14.5 psig**

OPTIONS:

- SB 82 – Integral Slam Shut Valve
- Integral Pilot Operated “Fail to Close” Monitor
- DB 851 - Integral Silencer
- Remote Operation

Distributed By



Meter, Valve & Control
877-566-3837

**DESIGNED
WITH YOUR
NEEDS IN MIND**

- COMPACT DESIGN
- OUTSTANDING TURN DOWN RATIO
- EASY MAINTENANCE
- HIGH ACCURACY
- TOP ENTRY
- LOW OPERATION COST
- LOW NOISE
- EXTREME FLEXIBILITY










Florentini USA
4555 South Berkeley Lake Road
Norcross, GA 30071
Toll - Free: 888.618.8787
Fax: 770.448.7312
www.fiousa.com

Pietro Fiorentini S.p.A.
via E.Fermi 8/10
I-36057 Arcugnano (VI) Italy
Tel: +39 0444 968.511
Fax: +39 0444 960.468
www.fiorentini.com

Pilot operating pressure regulator

Aperflux 851

-  Inlet Pressure
-  Outlet Pressure
-  Motorization
-  Motorization Monitor
-  Pilot Feed
-  Control Pressure

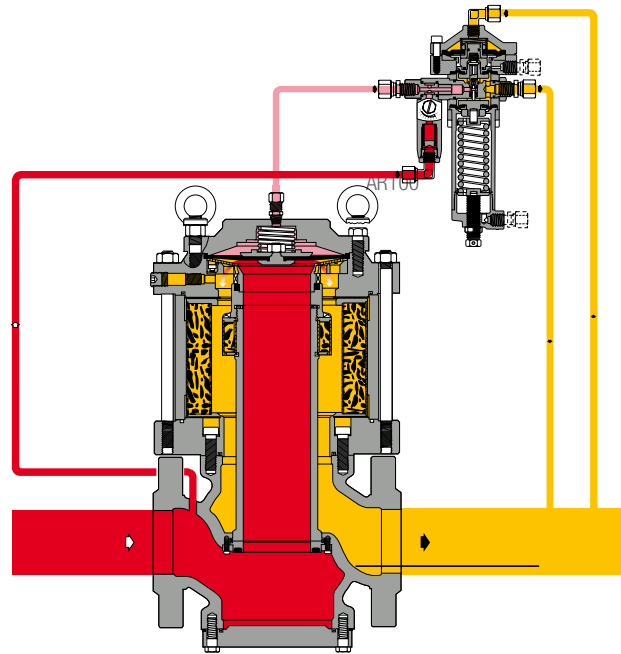


302/.
0,8 ÷ 9,5 bar
11,6 ÷ 137,7 psig

304/.
7 ÷ 43 bar
101,5 ÷ 623,5 psig

305/.
20 ÷ 60 bar
290 ÷ 870,2 psig

307/.
41 ÷ 74 bar
594,6 ÷ 1073,3 psig

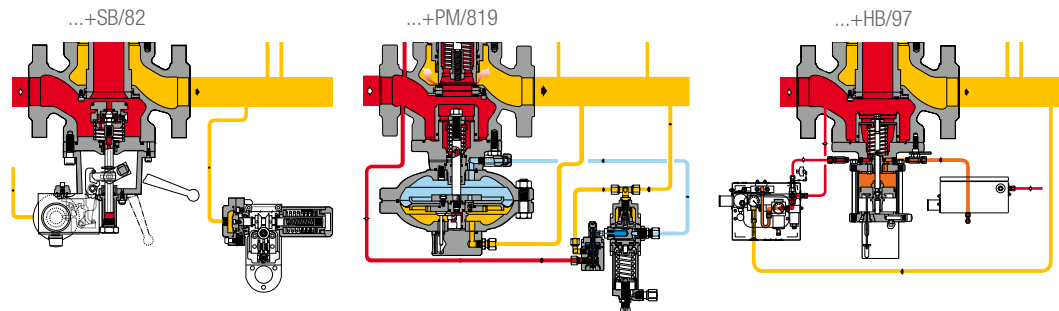

Aperflux 851 pressure regulators in action



Florentini USA **Toll - Free: 888.618.8787** Fax: 770.448.7312 www.fiousa.com

Pietro Fiorentini **Tel: +39 0444 968.511** Fax: +39 0444 960.468 www.fiorentini.com