


Lubricated Plug Valve Locking Device

UNIVERSAL

Now... A UNIQUE, TAMPER-PROOF LOCKING DEVICE FOR PLUG VALVES

- ADAPTS TO VALVES 1/2" THRU 6"
- FITS MOST EXISTING PLUG VALVES WITHOUT MODIFICATION
- ONE SIZE FITS ALL
- ELIMINATES NEED TO STOCK DIFFERENT SIZES
- UNIQUE SWIVEL FEATURE ALLOWS CAP TO BE TURNED WITH NO ROTATION OF THE PLUG
- TAMPER-PROOF—ELIMINATES GAS PILFERAGE
- WILL NOT RUST OR FREEZE UP
- INSTALLS WITH SNAP RING PLIERS

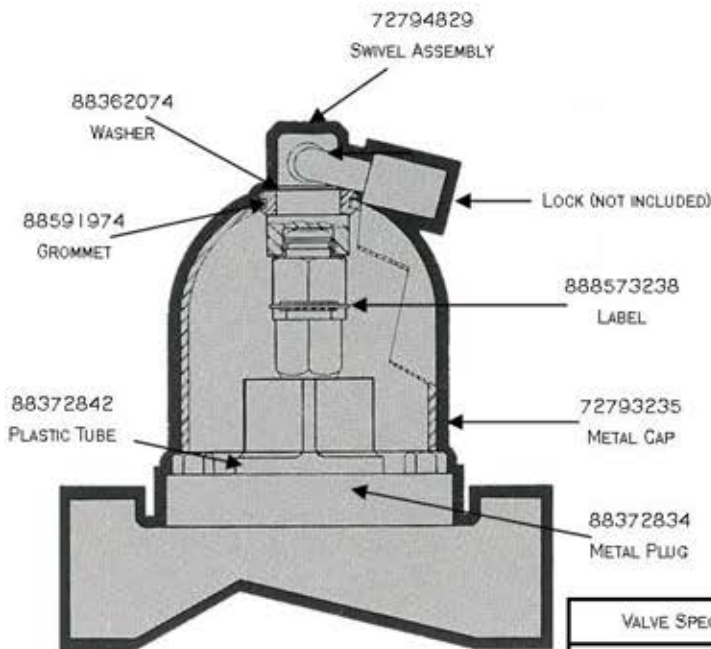

INSTALLATION INSTRUCTIONS

1. CONNECT SWIVEL ASSEMBLY TO GREASE FITTING.
2. REMOVE OR INSERT METAL PLUG - REFER TO TABLE 1.
3. USING A POCKET KNIFE OR UTILITY KNIFE, CUT THE PLASTIC TUBE IF REQUIRED - REFER TO TABLE 1.
4. PLACE PLASTIC TUBE OVER SWIVEL ASSEMBLY AND STEM.
5. PLACE METAL CAP OVER SWIVEL ASSEMBLY AND PLASTIC TUBE.
6. INSTALL METAL WASHER IF REQUIRED - REFER TO TABLE 1.
7. ATTACH LOCK.



VALVE SPECIFICATIONS		METAL PLUG P/N 88372834	PLASTIC TUBE P/N 88372842	METAL WASHER P/N 88362074
DESCRIPTION	SIZES			
CAST IRON SCREW END FLANGE END 200 WOG	UP TO 1 1/2"	INSERT	CUT AT C	REMOVE
	2"	INSERT	CUT AT B	REMOVE
	3" & 4"	REMOVE	DO NOT CUT	REMOVE
CARBON STEEL WELD END 200 WOG	2"	INSERT	CUT AT C	REMOVE
	3" & 4"	REMOVE	CUT AT B	INSTALL
	6"	REMOVE	CUT AT A	REMOVE
CAST IRON FLANGE END 200 WOG	6"	REMOVE	CUT AT A	REMOVE